


## Intepro 9000 Series

### Current Measurement Card


- Intepro 9000 System integrated Current Measurement Card
- Facilitates high accuracy DC Current measurement up to 50A
- Adjustable current and voltage ranges (Optional)
- Facilitates voltage measurements up to 500V

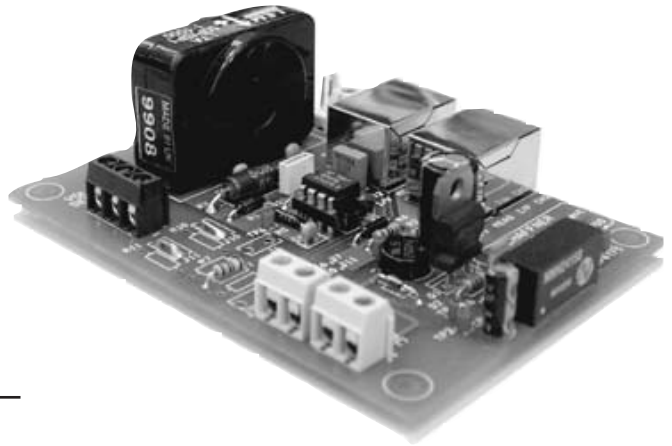

The Current Measurement Card is a highly accurate DC current measurement system designed to convert the current and voltages provided by system Power Supplies into voltages measurable by Intepro 9000 PSU Test Systems.

#### Key features of the Current Measurement Card include:

- An integrated Current Measurement channel, measuring up to 50A
- A voltage divider channel for dividing the input voltage to customer requirements
- Output is compatible with the Intepro 9000 Measurement Module

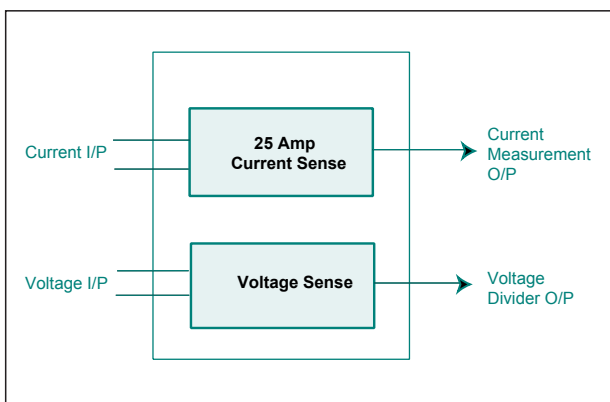

The Diagram above shows the basic structure of the Current Measurement card.

#### Current Measurement Card for Integrating into a Cabinet System

Specially designed by Intepro engineers, the Current Measurement Card allows more flexibility allowing higher currents and voltages to be measured by the Intepro 9000 system. Current and Voltage ranges can be adjusted to meet individual requests, while the card is also capable of yielding high accuracy for DC measurement.

The Current Measurement Card contains 2 separate electrically isolated input channels, a current channel and a voltage divider channel.

A LEM current transducer is used to convert the incoming current into voltage. 25A is standard, however the current rating may range from 5A to 50A.

The voltage divider channel can measure voltages as high as 500VDC. The default dividing ratio of 10:1 may be readjusted to meet any specific ratio requirements.

Withstanding overcurrents up to three times the current rating, the risk of the card burning out under faulty operating conditions is significantly reduced. If required, an additional Current and Voltage channel is available by integrating a second card into the system.

**Technical Specifications**

<b>Rated Input Current</b>	25A (standard)
<b>Current Input Ranges</b>	0-5A to 0-50A
<b>OverCurrent Capability</b>	3 x current rating
<b>Bandwidth</b>	50kHz
<b>Input Voltage Range</b>	0-500VDC
<b>Communications Interface</b>	N/A
<b>Accuracy</b>	* (See Note)
<b>Current Measurement</b>	I ≥ 20% of current rating: ±(0.2% of reading) I <20% of current rating: ±(0.04% of current rating)
<b>Voltage Measurement</b>	0.1% of voltage reading
<b>Input Resistance of Voltage Measurement</b>	150kΩ
<b>Operating Conditions</b>	
<b>Operating Temperature</b>	5°C to 55°C
<b>Storage Temperature</b>	-25°C to 70°C
<b>Humidity</b>	10% to 85% non condensing
<b>Dimensions</b>	100mm(L) x 73mm(W) x 40mm(H)
<b>Ordering Information</b>	
<b>Description</b>	Intepro 9000 Current Measurement Card
<b>Part Number</b>	713-1503

\* When determining the accuracy of current and voltage measurements, please take into account the accuracy of the Measurement Module also.



**Intepro Systems**  
1530 S. Lyon Street  
Santa Ana, CA 92705  
+1.714.679.9749  
+1.714.835.3441 (Fax)

**EU/Ireland**  
Intepro Systems  
Lonsdale Road  
National Technology Park  
Limerick / Ireland  
+353.61.33.22.33  
+353.61.33.25.84 (Fax)

**UK**  
Intepro Systems  
Ashville Way  
Molly Millar's Lane  
Wokingham / UK  
+44.118.977.0070  
+44.118.979.2969 (Fax)